



PLINTH 02 LAMP

SAFETY INFORMATION

Please contact a licensed electrician for installation.


Suitable for dry, indoor use only.

Maximum ambient temperatures: 25°C

REQUIRES 2 PEOPLE THAT CAN CARRY UP 50LBS Each. Weight: 80LBS


LAMPING

Hardwired LED with internal driver, 2700K color temperature.

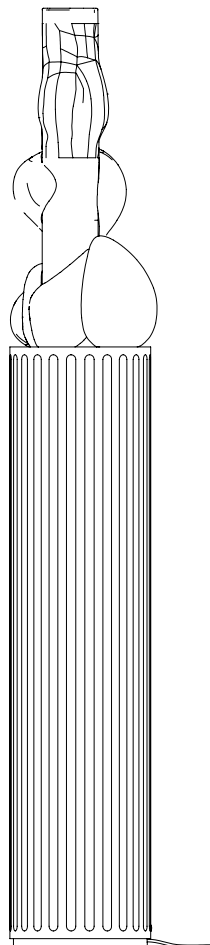



PLINTH 02 LAMP

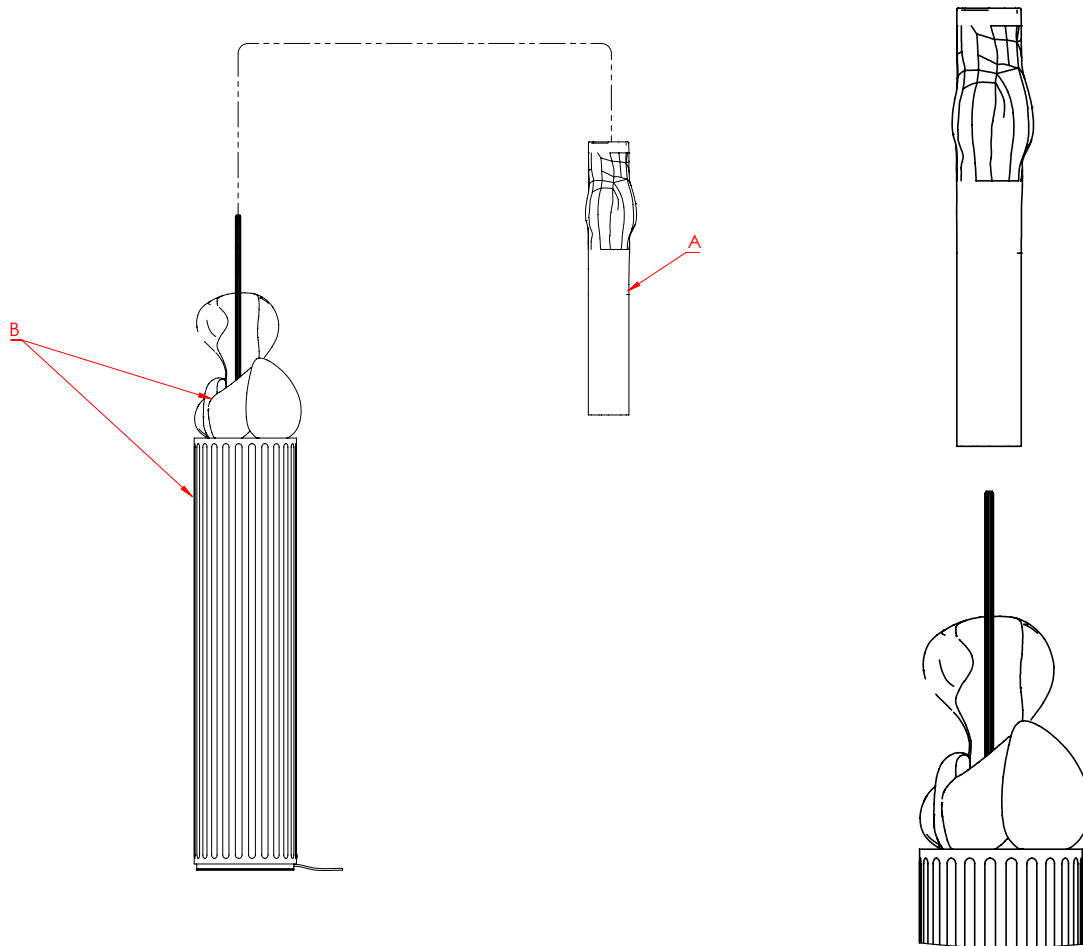

1. Carefully unpack Plinth 02 Base (B) and Glass (A).
2. Move Plinth 02 base (B) into position.
3. Carefully lift glass (A) above your assembly and orient it as shown. Slowly and firmly apply downward pressure until the glass is fully seated. Note that there will be resistance from the buffers between the glass and stone; do not force or overtighten the glass.