



GLYPH

SAFETY INFORMATION

Please contact a licensed electrician for installation.


Suitable for dry, indoor use only.

Maximum ambient temperature: 25°C.

INSTALLATION OF THIS FIXTURE REQUIRES AT LEAST 3 PEOPLE.


LAMPING

4× G9 bulbs (max 10W, 4.5W LED bulb included) + 24V hardwired LED strip.

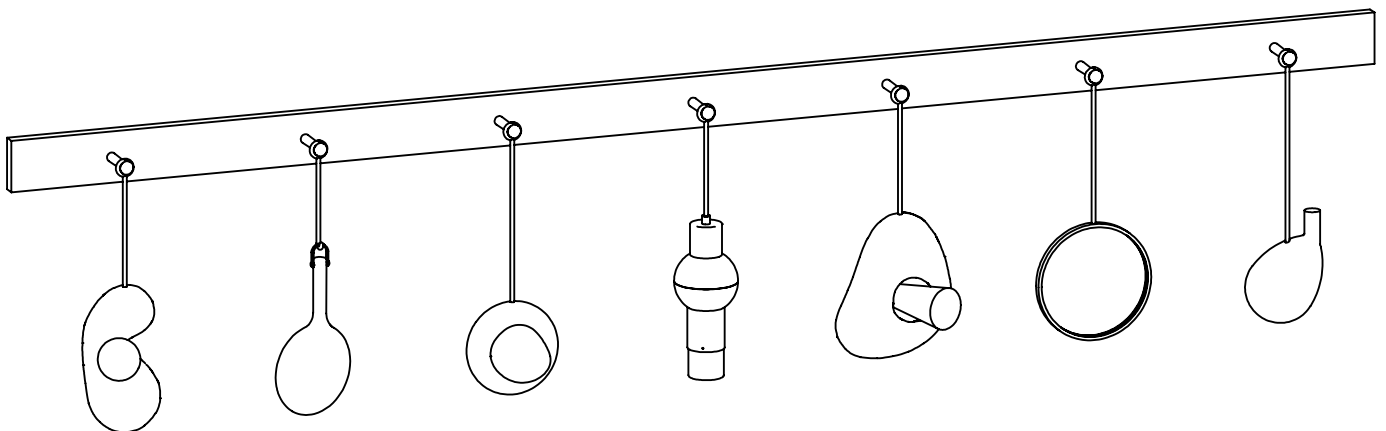




GLYPH

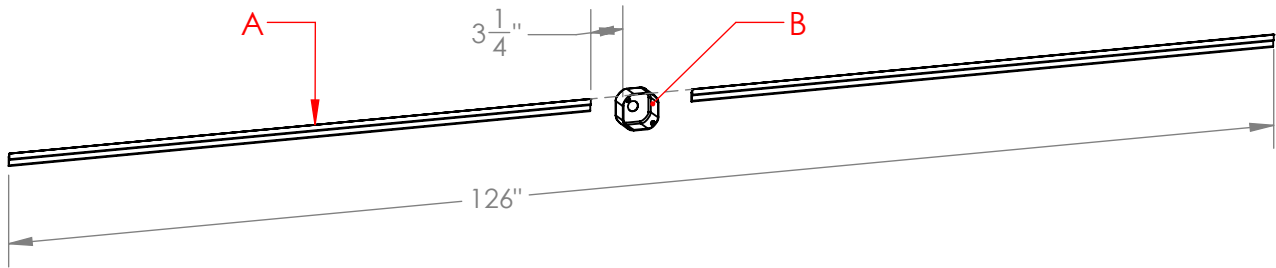


1. Securely mount cleats (A) on either side of j-box (B) as shown, using appropriate hardware (not included). Leave 3-1/4" gap between edge of j-box and edge of cleat. End-to-end span of cleats should not exceed 126" inches. Align top edge of cleats with top edge of j-box. NOTE: CLEATS MUST BE INSTALLED ONTO STUDS OR OTHER STRUCTURAL ELEMENT CAPABLE OF SUPPORTING AT LEAST 200 LBS.

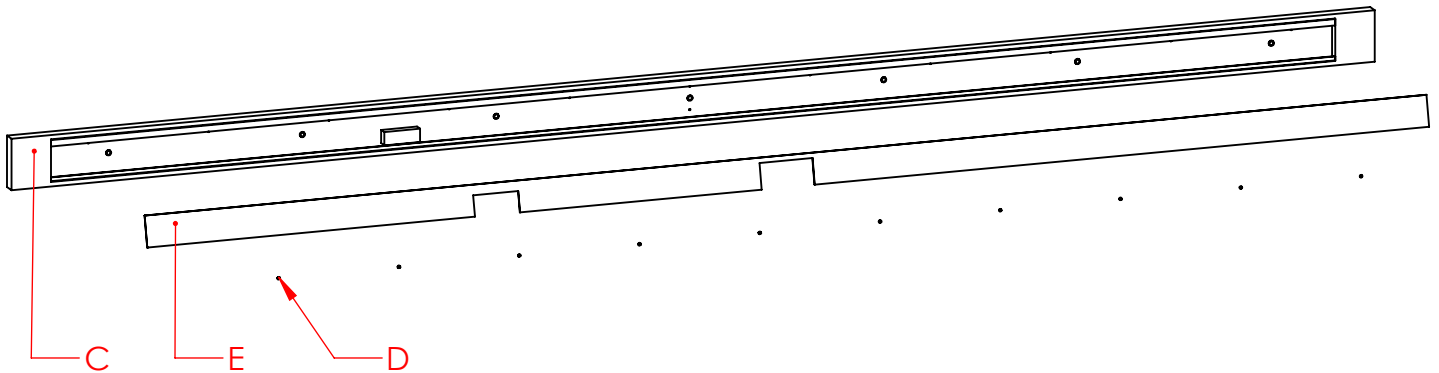

2. Unwrap the peg rack (C) and flip it over so you are looking at the back side as shown. Remove the 11 small screws (D), and then remove the cover plate (E). Set these parts aside until later in the installation.





GLYPH

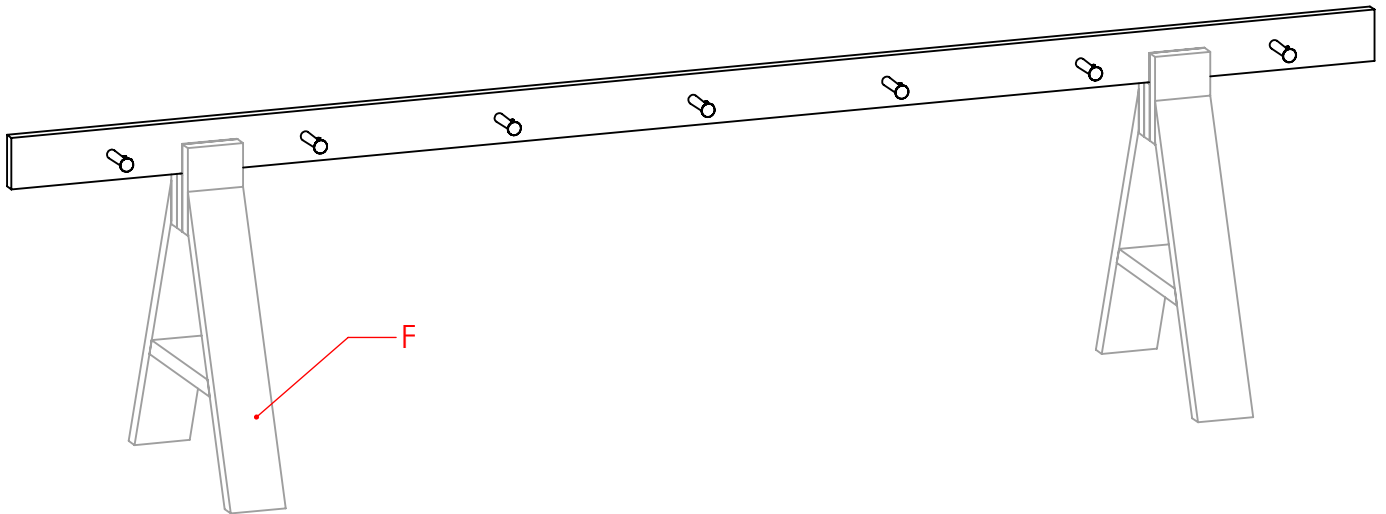

3. Set the peg rack securely onto the temporary assembly supports (F). The rack will remain in this position for the remainder of the assembly and wiring process (steps 4-8), until it is ready to be mounted onto the wall.



GLYPH

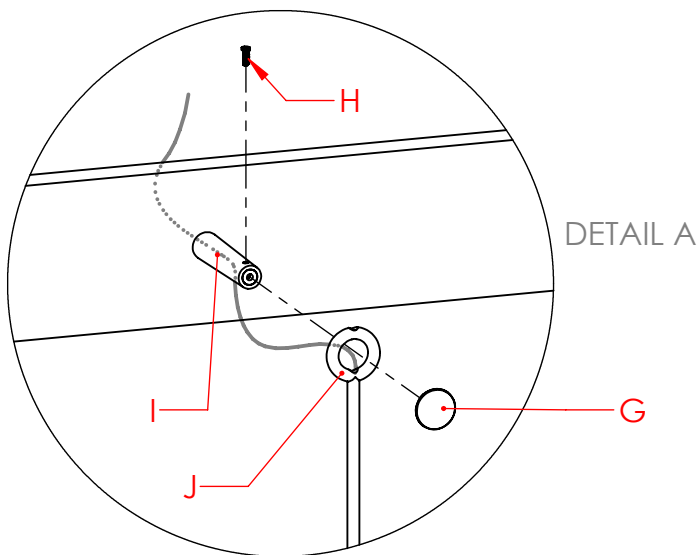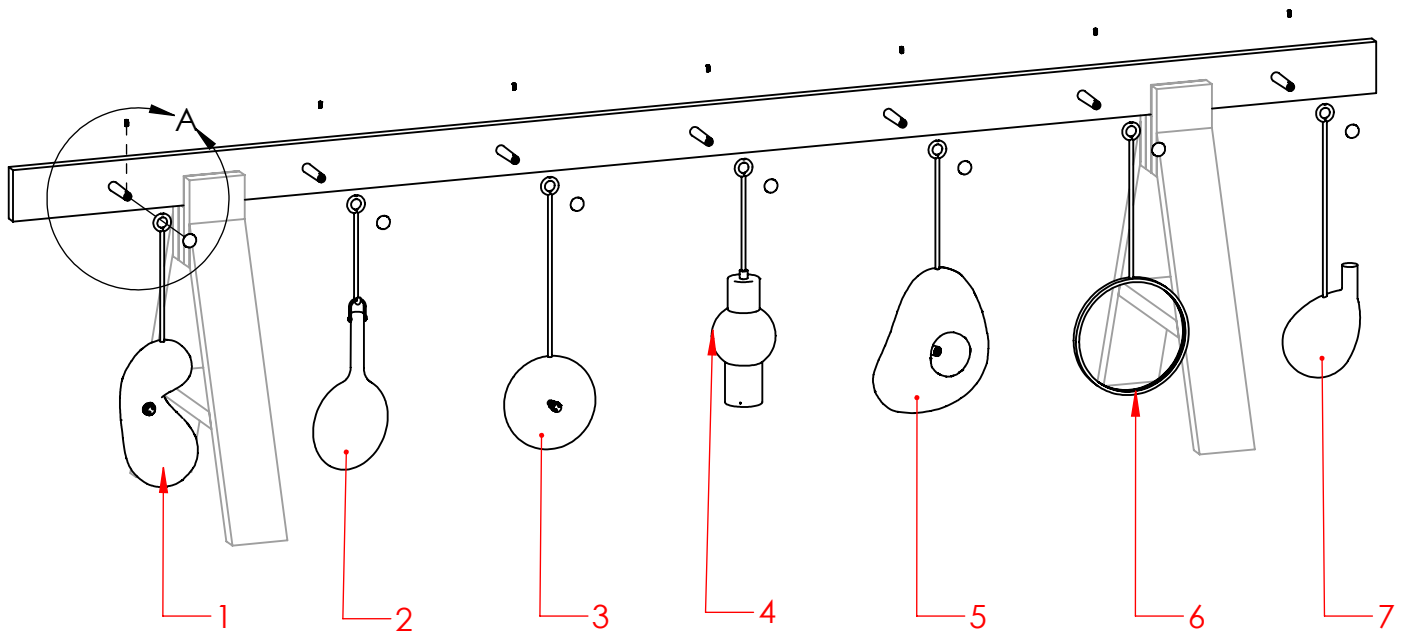

4. Carefully unwrap fixtures 1-7. **MAKE SURE TO LEAVE THE INNER LAYER OF TISSUE AND PLASTIC WRAP ON UNTIL ASSEMBLY IS COMPLETE.**

5. When attaching the fixtures, work from the center out, in the following order - 4, 3, 5, 2, 6, 7, 1. This is very important to maintain a proper balance while the piece is being assembled.

6. To install each fixture, first remove peg end (G) and socket screw (H) and set aside. Slide loop (J) onto end of peg (I), while feeding power wires through the hole in the bottom of the peg and out the back of the peg rack. Be


careful not to pinch the wires during this process. Fix loop in place using socket screw (H), then replace peg end (G). Note: Fixtures 2 and 7 have no electrical wires.

7. Once all fixtures are installed onto their respective pegs, wire them together on the back side as shown in the wiring diagram on the last page of this document.

8. Replace the cover plate removed in step 2, and secure in place with the 11 small screws. All internal wiring should be concealed by the cover plate, except for one live, one neutral, and one ground wire emerging from the center.



GLYPH

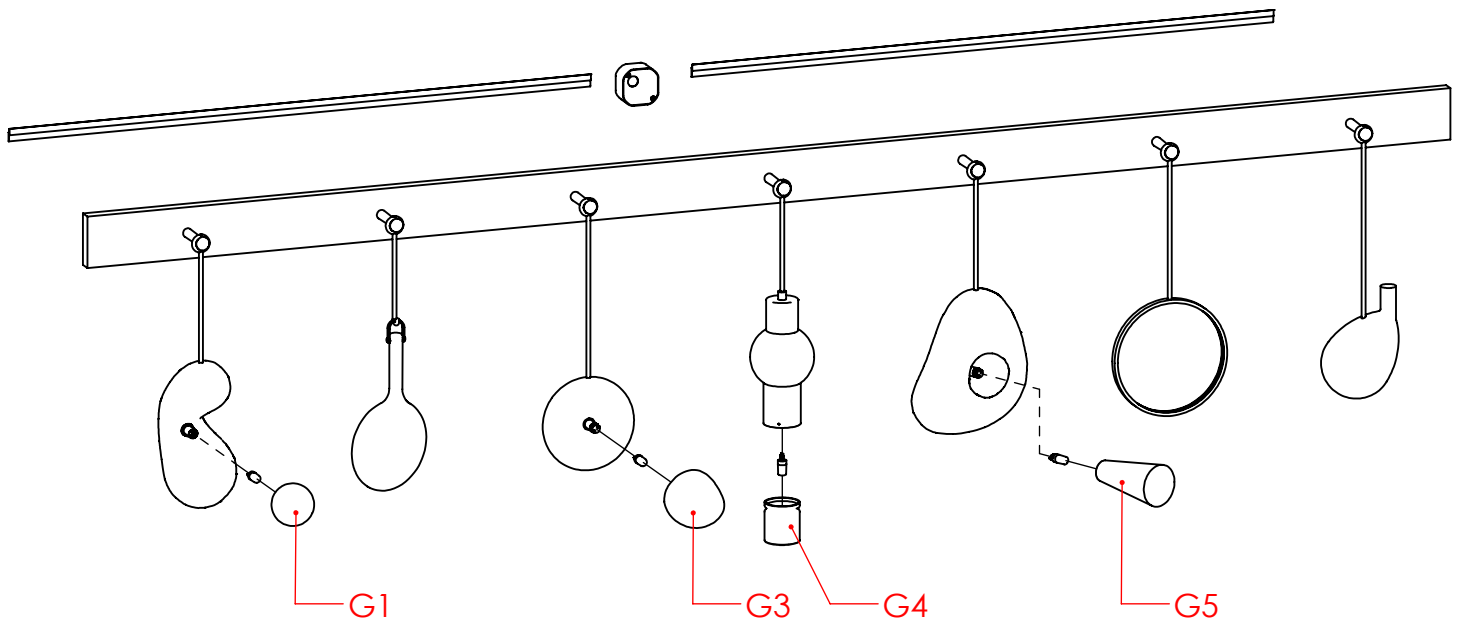

9. Carefully lift fully-assembled piece off supports and carry to installation location. Wire piece to j-box as show in wiring diagram, then install onto wall cleats. **THIS STEP REQUIRES A MINIMUM OF 3 PEOPLE.**
10. Carefully unwrap the final layer of tissue and plastic wrap from the hanging fixtures, then install included G9 bulbs and glass shades as shown.



GLYPH

