



HANDKERCHIEF LIGHT


SAFETY INFORMATION

Please contact a licensed electrician. Only suitable for direct mounting to non-combustable surfaces. Under no circumstances can Anna Karlin lighting be mounted on normally flammable surfaces. Suitable for dry, indoor use only. Maximum ambient temperatures: 25°C

INSTALLATION OF THIS FIXTURE REQUIRES 2 PEOPLE.


LAMPING

6× hardwired LED modules, powered by 120/240V onboard driver.

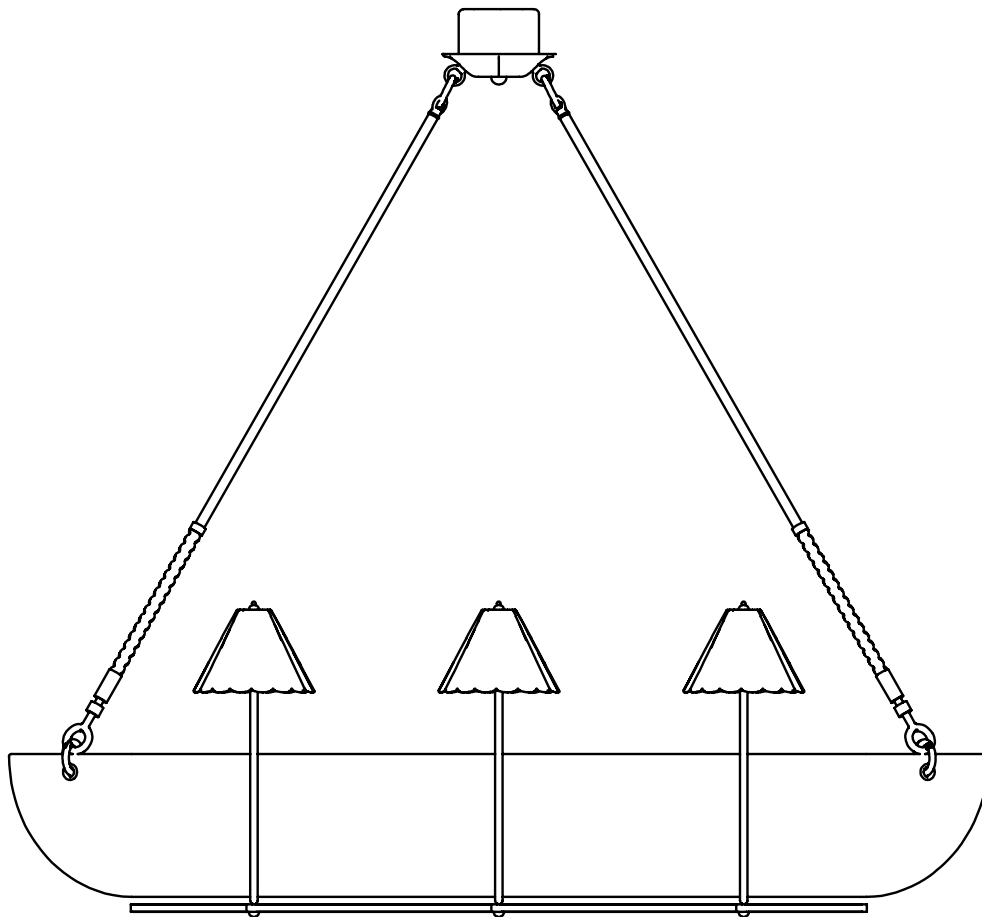



HANDKERCHIEF LIGHT

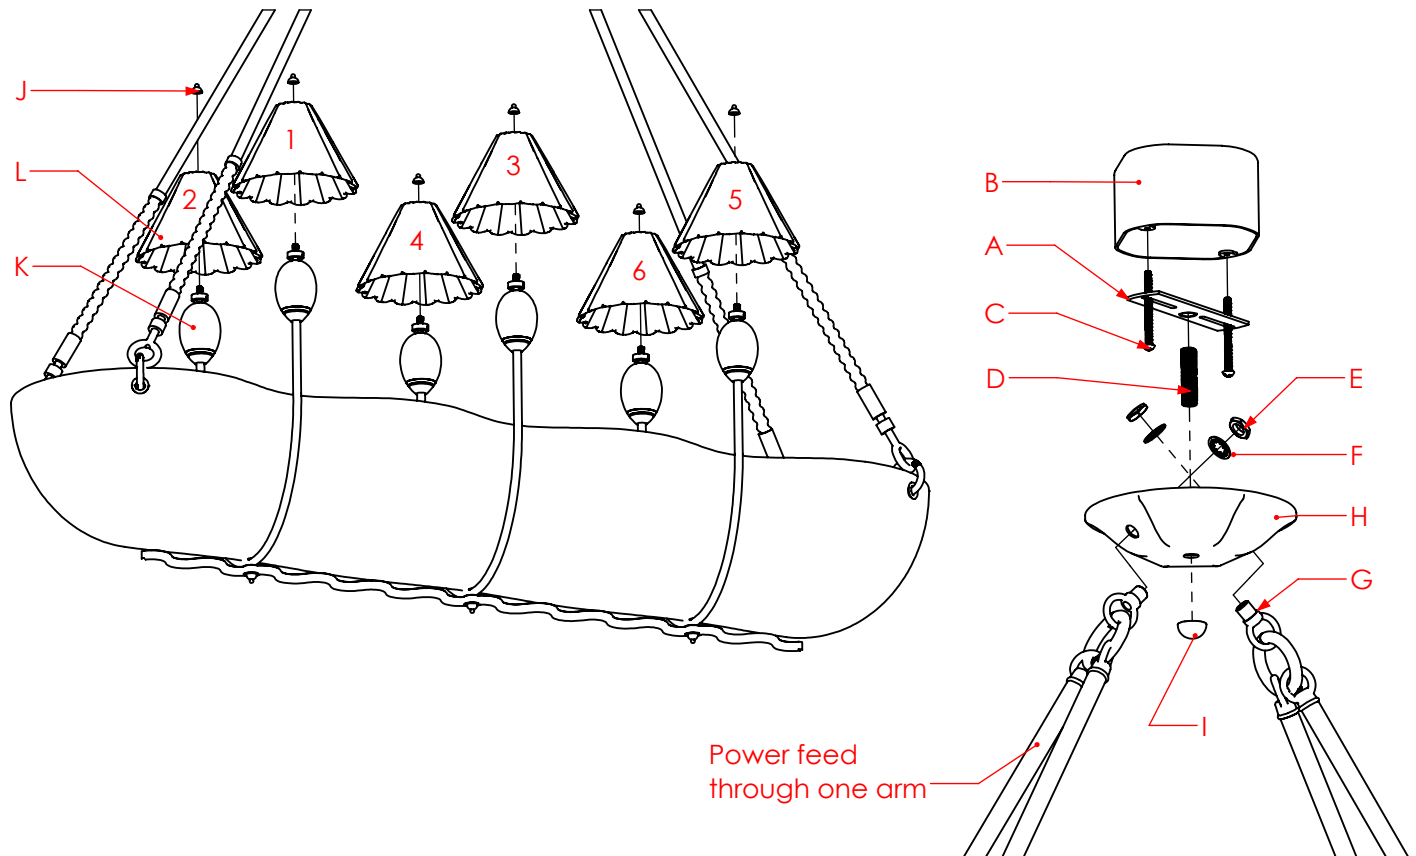

INSTALLATION OF THIS FIXTURE REQUIRES 2 PEOPLE. THROUGHOUT ASSEMBLY AND INSTALLATION, TAKE EXTRA PRECAUTIONS WHEN HANDLING THE LARGE ACRYLIC DIFFUSER, AS ITS SURFACE IS EASILY DAMAGED.

1. Attach bracket (A) to j-box (B) using steel screws (C), then insert mounting nipple into center hole of bracket approximately 1/2".
2. Remove hex nuts (E) and lock washers (F) from loops (G) at the ends of the arm assemblies.
3. Pass the threaded ends of the loops through the holes in the canopy (H), then attach the lock washers and nuts and firmly tighten. Make sure the opening of loop (G) is parallel to the front of the fixture, as shown in the drawing on page 1.
4. Lift the entire fixture up to meet the j-box on the sloped ceiling. One person should support the body of the fixture, while another guides the canopy into place.
5. Splice wires in j-box, then pass the nipple (D) through the hole in the center of the canopy, and secure it to the ceiling by firmly tightening the finial (I) until the canopy is flush to the ceiling.
7. Remove and set aside finials (J) from the tops of the 6 light globes (K). Place glass shades (L) onto threaded studs, then replace finials and tighten until the glass is held firmly. Do not overtighten.