



LANTERN STACK


SAFETY INFORMATION

Please contact a licensed electrician. Only suitable for direct mounting to non-combustable surfaces. Under no circumstances can Anna Karlin lighting be mounted on normally flammable surfaces. Suitable for dry, indoor use only. Maximum ambient temperatures: 25°C

INSTALLATION OF THIS FIXTURE REQUIRES 2 PEOPLE.


LAMPING

Hardwired LED light source, powered by 120/240V driver.
DRIVER MUST BE INSTALLED REMOTELY, NO MORE THAN 15 FEET FROM FIXTURE.

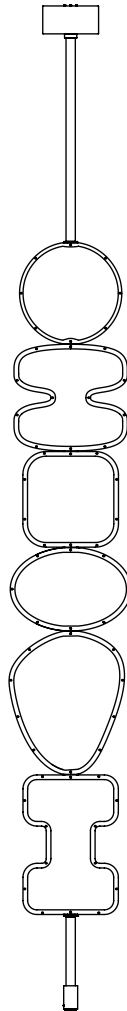



LANTERN STACK

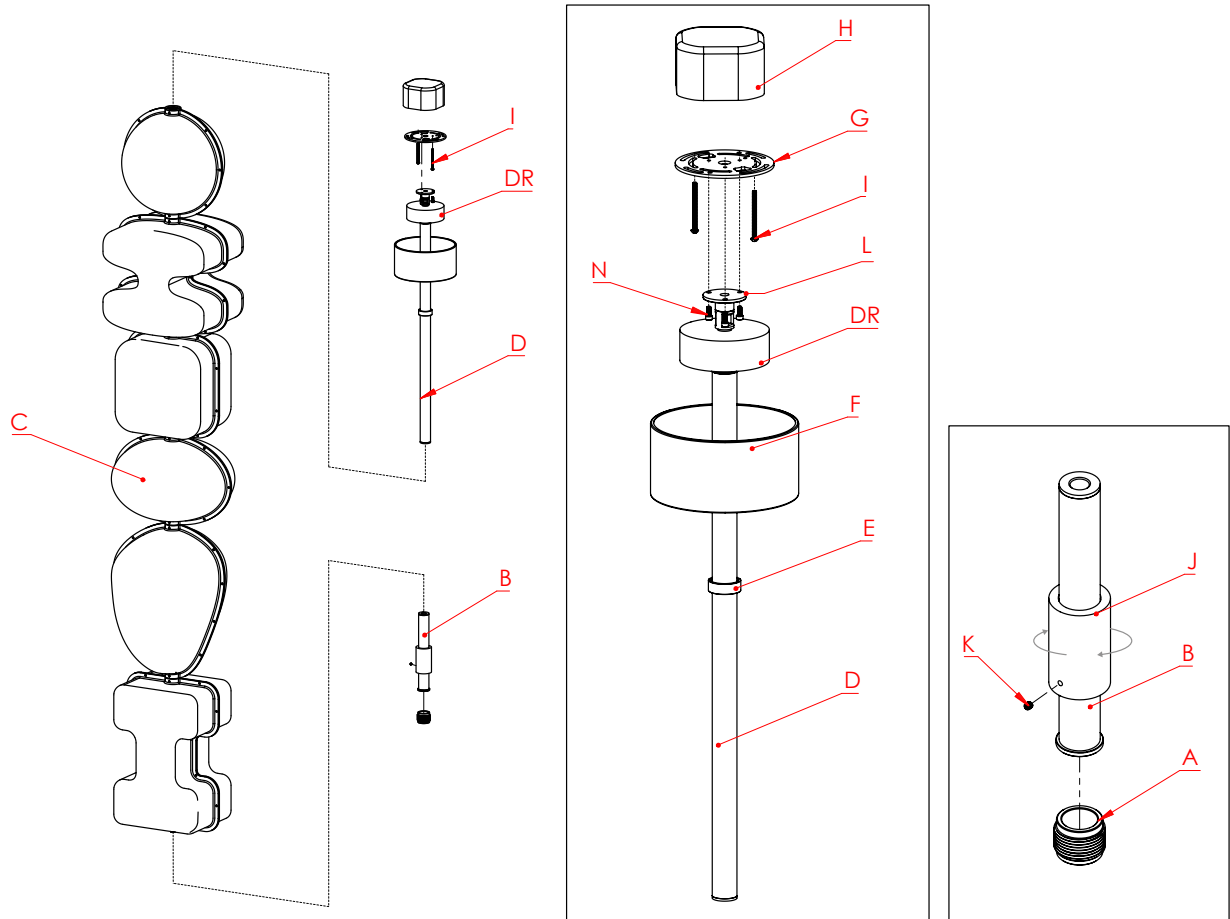

INSTALLATION OF THIS FIXTURE REQUIRES 2 PEOPLE. THROUGHOUT ASSEMBLY AND INSTALLATION, TAKE EXTRA PRECAUTIONS WHEN HANDLING THE FIBERGLASS SHELLS TO AVOID DAMAGE

1. Attach mounting bracket (G) to J-box (H) using screws (I).
2. Install threaded foot cup (A) to floor directly below j-box, using appropriate hardware/anchor (not included). Use laser level or plumb to confirm alignment.
3. Attach foot stem assembly (B) to threaded hole at bottom of fixture body (C).
4. Attach canopy stem assembly (D) to threaded hole at top of fixture body.
Run wires up and out through center.
5. Unthread canopy collar (E) and lower canopy (F) to access bracket (L).
6. Splice wires in j-box (H), then raise fixture up attaching the inner bracket (L) to the ceiling bracket (G) using screws (N).
7. Raise canopy to ceiling and hold in place by rethreading canopy collar.
8. Thread foot shaft (J) onto foot cup until fixture is held in tension, then lock in place by tightening set screw (K). Do not overtighten the shaft.