



---

# LUNA LIGHT - SMALL

## *SAFETY INFORMATION*

Please contact a licensed electrician.

Only suitable for direct mounting to non-combustable surfaces.

Under no circumstances can Anna Karlin lighting be mounted on normally flammable surfaces.

Suitable for dry, indoor use only.


Maximum ambient temperatures: 25°C

---

## *LAMPING*


3 4.5W E12/E14 LED bulbs, 2700K color temperature.

---

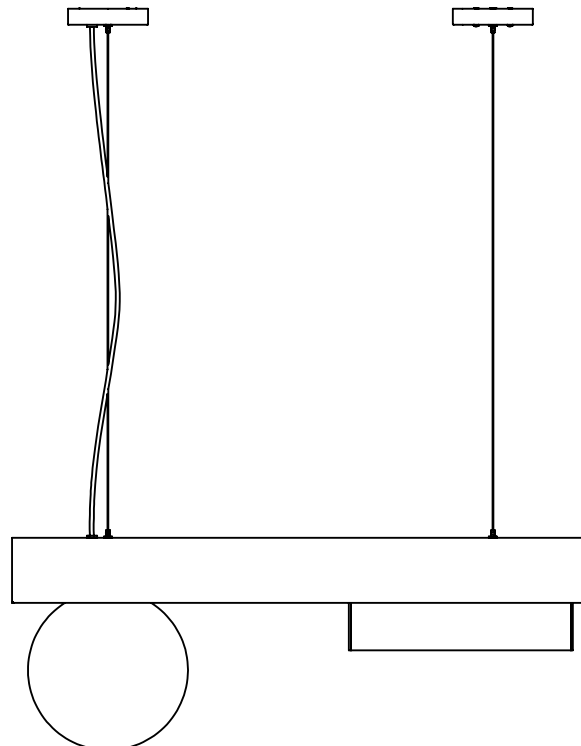



# LUNA LIGHT - SMALL

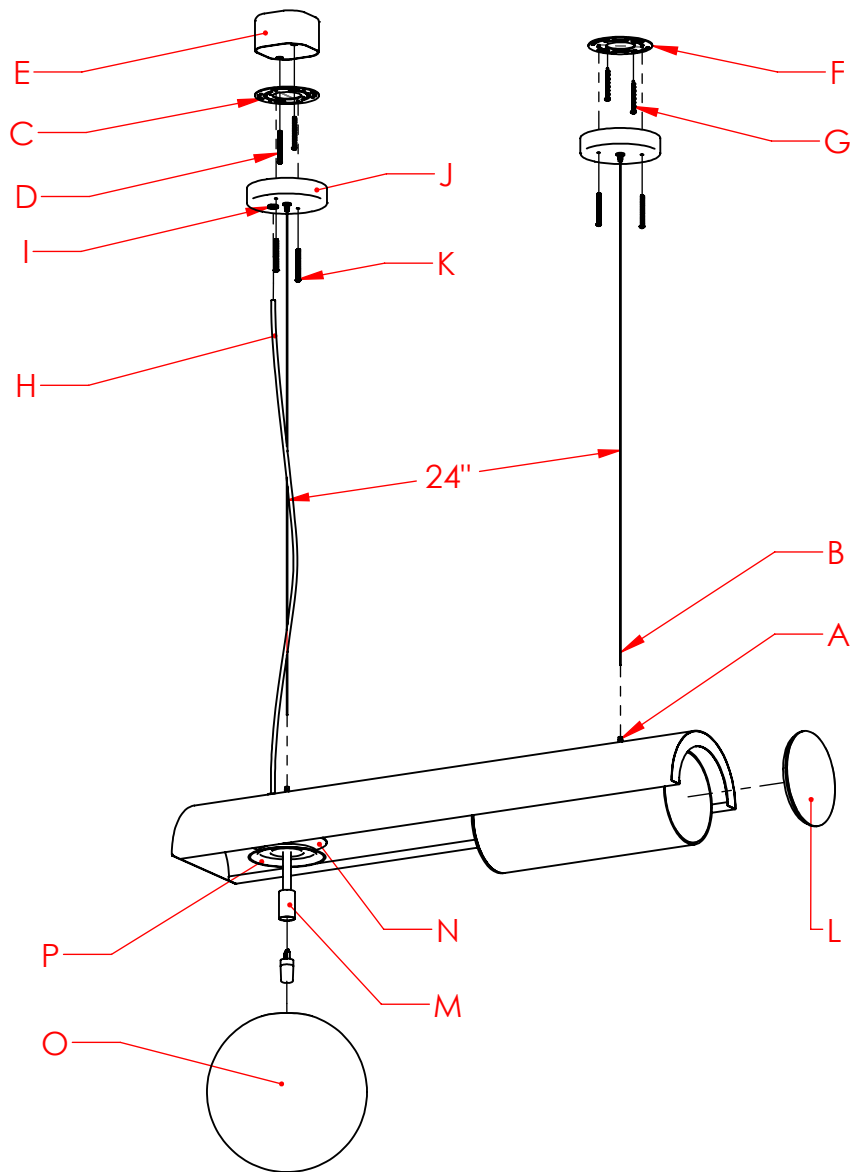



---

# LUNA LIGHT - SMALL

1. Remove safety nuts from tops of cable grippers (A). Slide nuts onto ends of suspension cables (B), then insert cables into grippers until secure (approx. 1"). Slide safety nuts down and tighten.
2. Fix bracket (C) to J-box (E) using steel screws (D), then fix bracket (F) to a point on the ceiling 24" from center of J-box as shown, using appropriate anchors/fasteners (G, PROVIDED BY CLIENT).
3. Feed power cable (H) through cord bushing (I). Secure cord using strain relief on interior of canopy (J), then splice live, neutral, and earth wires in J-box.
4. Secure canopies (J) to brackets (C) and (F) using finished screws (K).
5. If necessary, fine-tune fixture hanging height and level using cable grippers (A). Make sure to re-tighten safety nuts when finished.
6. Remove end cap of cylinder (L). Install included bulbs into interior sockets, then replace end cap securely.
7. Install included bulbs into globe lamping assembly (M).
8. Loosen set screw on slip collar above brass globe cover (N).
9. Slide brass globe cover (N) up pipe, then fit globe (O) into place so it sets centered on steel globe holder (P).
10. Lower slip collar and tighten set screw.