



SKETCH PENDANT - SINGLE

SAFETY INFORMATION


Please contact a licensed electrician for installation.

Suitable for dry, indoor use only.

Maximum ambient temperatures: 25°C


LAMPING

1 4.5W G9 LED bulb, 2700K color temperature.

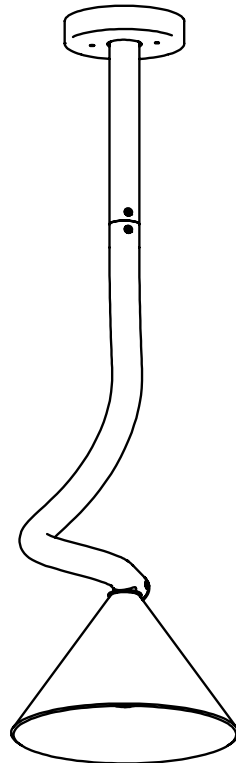



SKETCH PENDANT - SINGLE

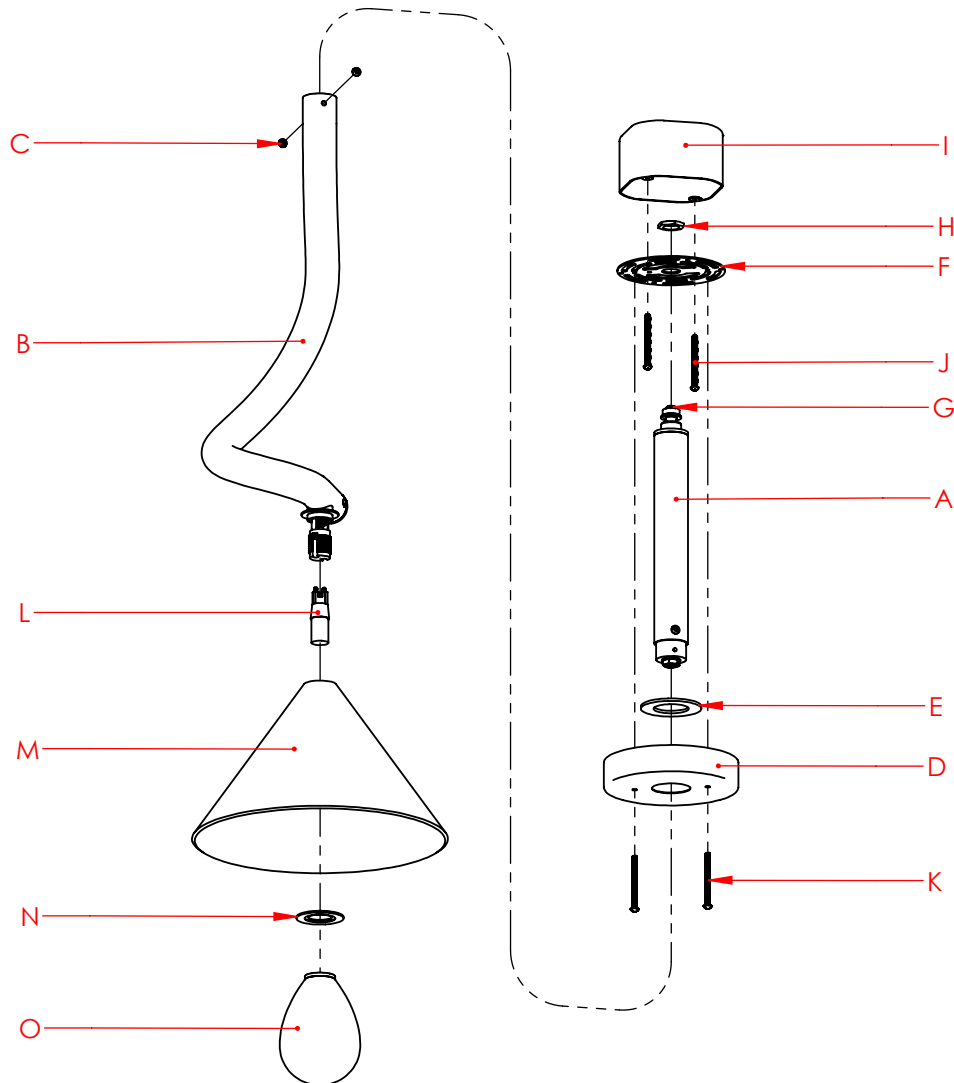

1. Feed wires from fixture body (B) through drop assembly (A), then attach fixture body to drop assembly using screws (C).
2. Slide canopy (D) and washer (E) down the drop assembly so they rest above the screws. Take care not to damage the finish.
3. Attach mounting bracket (F) to hangstraight (G) using nut (H) and tighten firmly.
4. Splice wires in j-box, then attach mounting bracket to j-box (I) using steel screws (J).
5. Raise the canopy and washer up to the ceiling, and attach canopy to mounting bracket using finished screws (K).
6. Install included G9 bulb (L) into socket, then slide porcelain cone (M) over bulb and socket until it is pressed against the silicone gasket.
7. Balance washer (N) on top of metal neck of the glass globe (O). Then, while holding porcelain shade in position, screw globe assembly onto external threads of socket until porcelain shade is held securely in place.
DO NOT OVERTIGHTEN. PORCELAIN WILL CRACK UNDER EXCESSIVE FORCE.