




INTERVENTION LIGHT

SAFETY INFORMATION

Suitable for dry, indoor use only.
Maximum ambient temperatures: 25°C


LAMPING

1× hardwired LED module. 13W, 1600 lumens, 2700K color temperature.

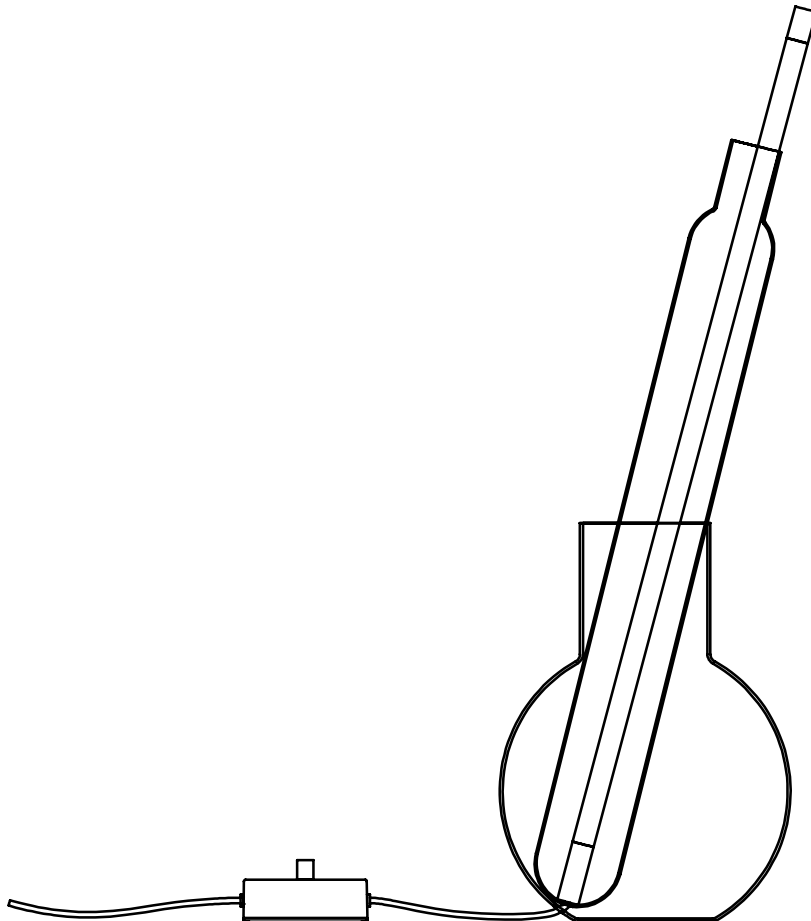



INTERVENTION LIGHT

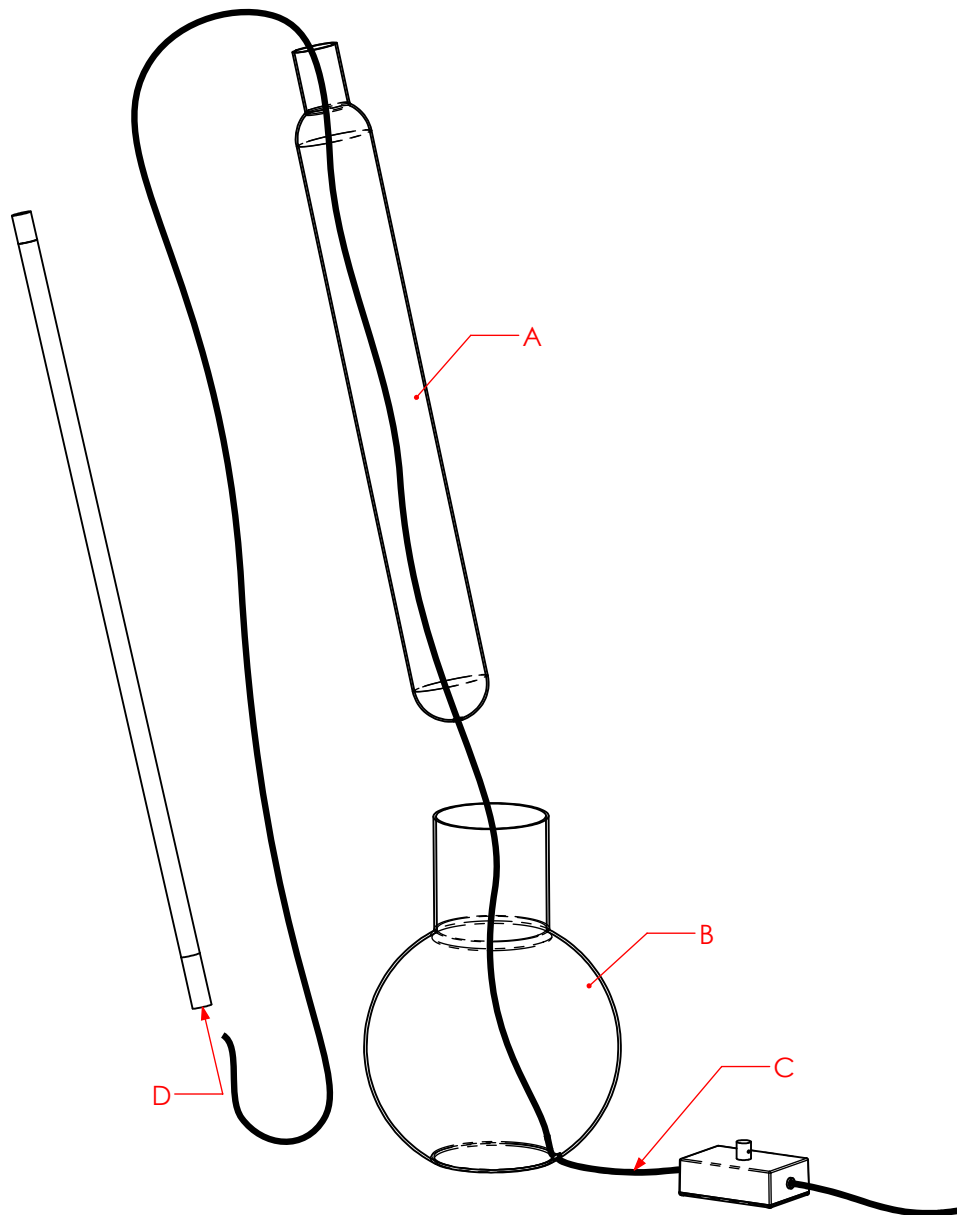

1. Carefully slide glass piece [A] into glass piece [B], and make sure that the small holes at the bottom of each piece are aligned.
2. Pass the barrel plug end of the cord set [C] through the holes, and feed out through the mouth at the top of glass [A].
3. Connect the barrel plug to the inset socket at the bottom of the LED light stick [D], then slide the light stick into the glass until it is resting at the bottom.