



FACE LIGHT


SAFETY INFORMATION

Please contact a licensed electrician. Only suitable for direct mounting to non-combustable surfaces. Under no circumstances can Anna Karlin lighting be mounted on normally flammable surfaces. Suitable for dry, indoor use only. Maximum ambient temperatures: 25°C

INSTALLATION OF THIS FIXTURE REQUIRES 2 PEOPLE.


LAMPING

1× G9 bulb (max 60W, 4.5W LED bulb included).

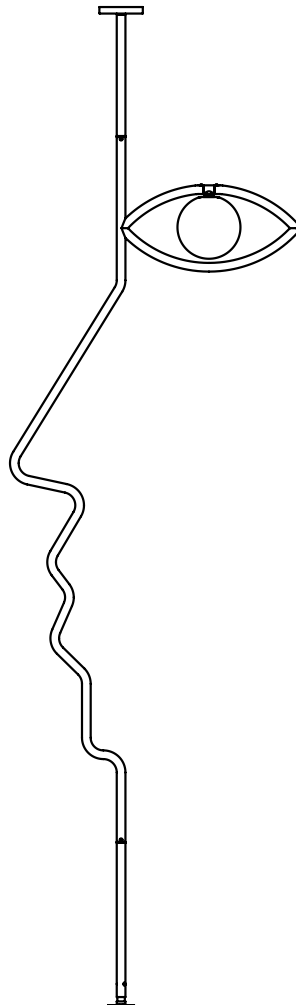



FACE LIGHT

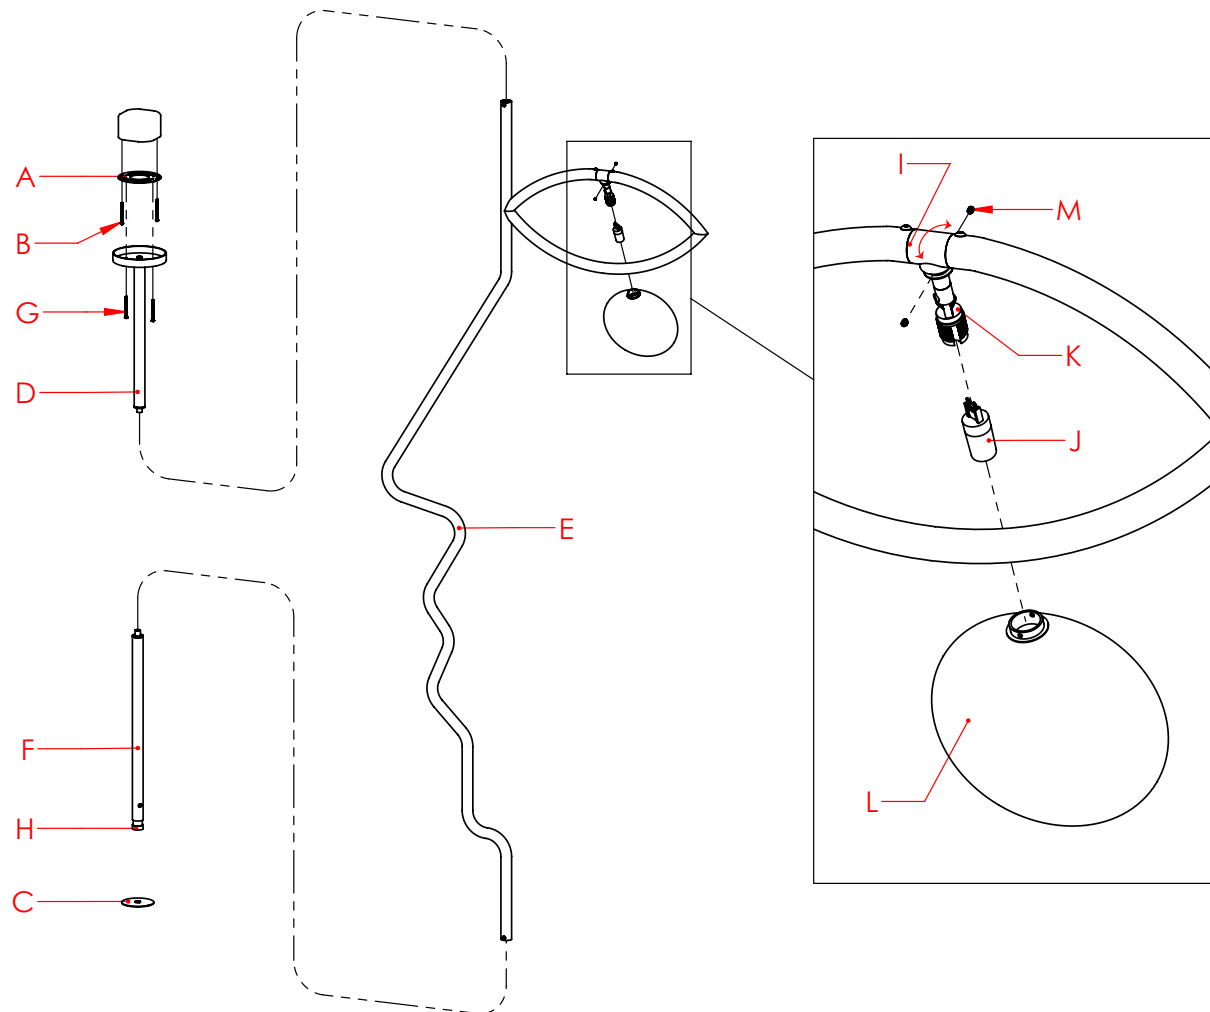

1. Attach bracket (A) to j-box using steel screws (B). If no j-box present, then attach securely to as-built ceiling using appropriate anchors (not included).
2. Install floor plate (C) directly below bracket on center using appropriate hardware/anchor (not included). Use plumb or laser to make sure they are perfectly aligned.
3. Run wires emerging from top of fixture body (E) up through segment (D), then Screw bottom end of (D) into top end of (E).
4. Screw top end of segment (F) into the bottom of (E)
6. Carefully move assembled fixture into vertical position on top of floor plate (C) until it keys into place.
7. Splice wires in j-box, then raise entire fixture up to meet ceiling bracket and attach canopy to bracket using finished screws (G). There should now be a small gap between the bottom of the fixture and the floor plate.
8. Grip extending foot (H) and unscrew counter-clockwise to lower it toward the floor. Keep unscrewing until bottom of tube mates firmly with floor plate (C). DO NOT OVERTIGHTEN.
9. Rotate segment (I) so that socket assembly (K) is clear of bottom of "eye", then install bulb (J).
10. Slide glass (L) over bulb and socket assembly, then fasten in place with set screws (M).