



FACE LIGHT (PLUG-IN)


SAFETY INFORMATION

Please contact a licensed electrician. Only suitable for direct mounting to non-combustable surfaces. Under no circumstances can Anna Karlin lighting be mounted on normally flammable surfaces. Suitable for dry, indoor use only. Maximum ambient temperatures: 25°C

INSTALLATION OF THIS FIXTURE REQUIRES 2 PEOPLE.


LAMPING

1× G9 bulb (max 60W, 4.5W LED bulb included).

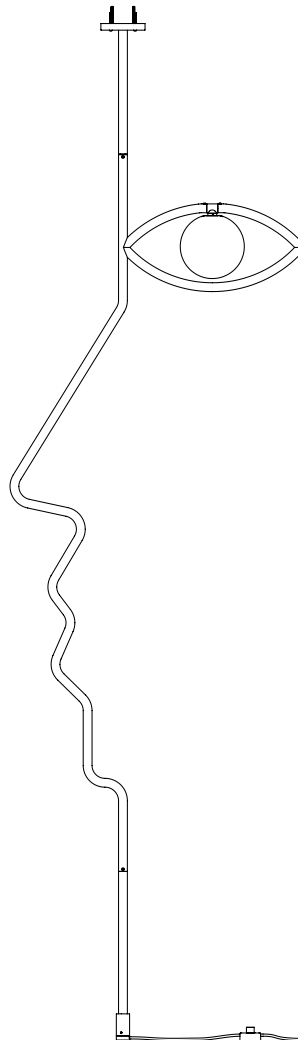



FACE LIGHT (PLUG-IN)

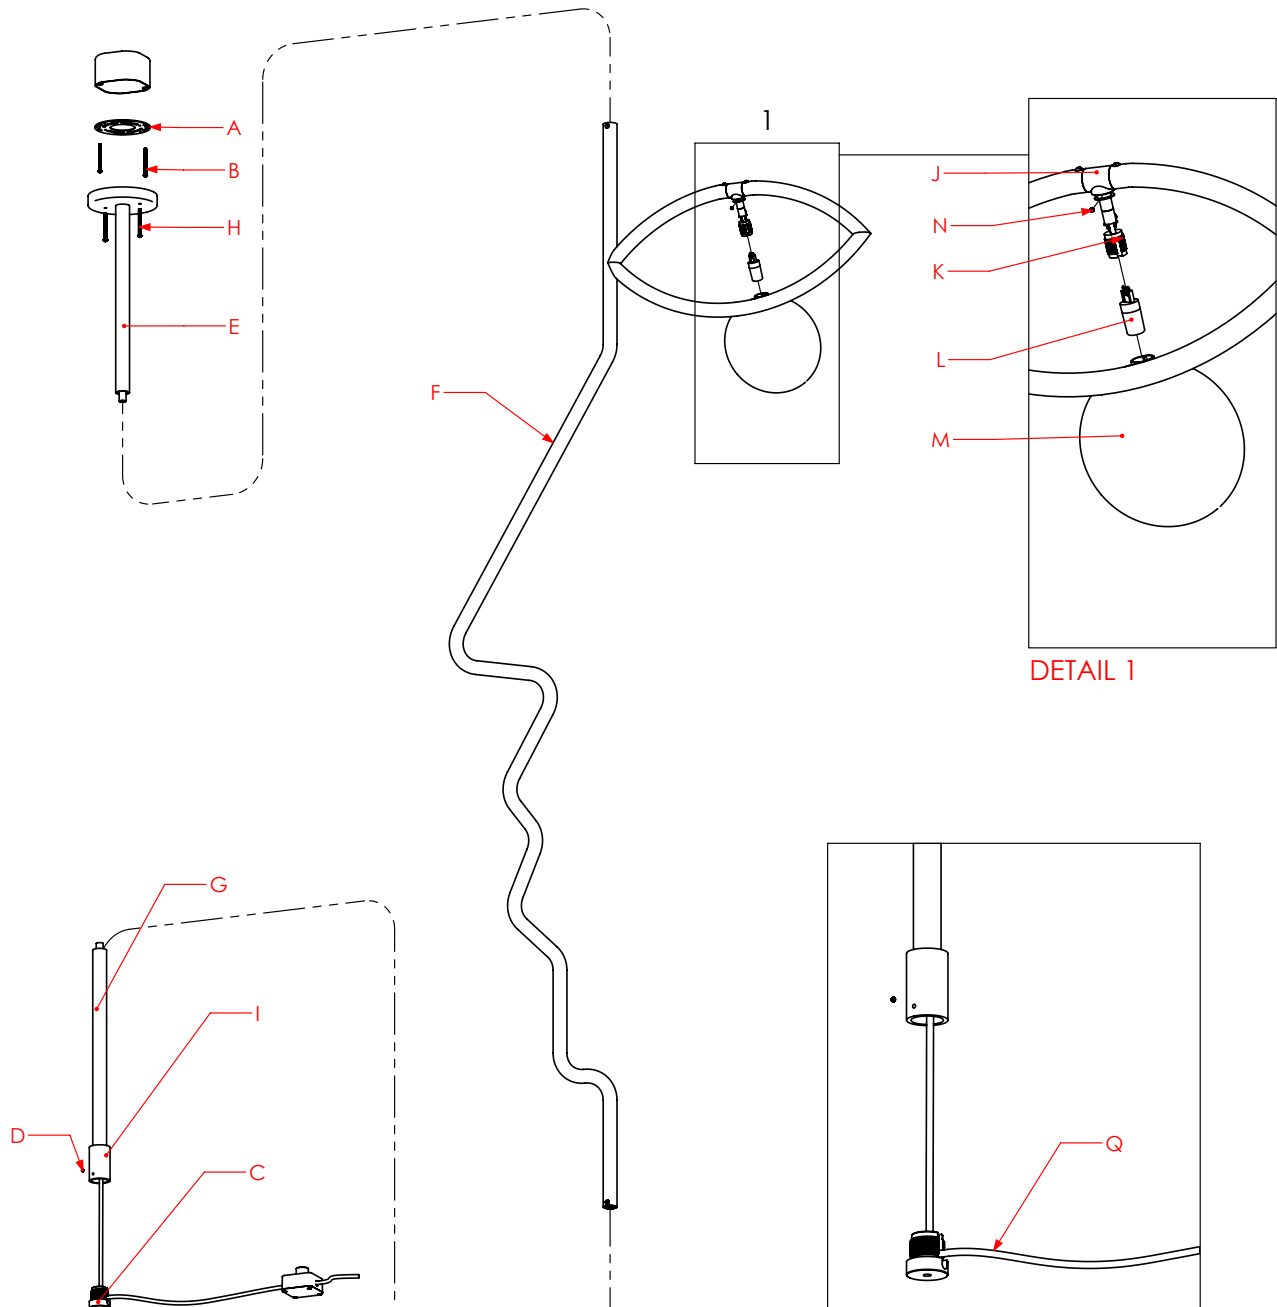



FACE LIGHT (PLUG-IN)

1. Attach bracket (A) to ceiling using appropriate anchor hardware (B, NOT INCLUDED).
2. Install floor plate (C) directly below ceiling mount point, using appropriate anchor hardware (NOT INCLUDED). Use plumb or laser to make sure they are aligned properly. Ensure that the cord exit hole is facing in the desired direction.
3. Screw bottom end of section (E) into top end of fixture body (F).
4. Run cord through section (G), then screw into the bottom of fixture body (F).
6. Carefully move assembled fixture into vertical position on top of floor plate assembly. LIFT PART (I) IF NEEDED.
7. Raise entire fixture up to meet ceiling bracket and attach canopy to bracket using finished screws (H). Align cord (Q) with the opening on the side of floor plate (C).
8. Lower part (I) and thread it downwards onto floor plate (C), until the fixture is rigid. DO NOT OVER TIGHTEN. Thread 8-32 set screw (D) into the side of part (I) to lock assembly in place.
9. Rotate tube segment (J) so that socket assembly (K) is clear of bottom of “eye”, then install bulb (L).
10. Slide glass (M) over bulb and socket assembly, then fasten in place with set screws (N).
11. Rotate tube segment (J) back to original position. Tighten top screws if needed.